




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>H04N 7/173</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/49663</b>  (43) International Publication Date: 30 September 1999 (30.09.99)
<p>(21) International Application Number: <b>PCT/IB99/00507</b></p> <p>(22) International Filing Date: <b>24 March 1999 (24.03.99)</b></p> <p>(30) Priority Data: <b>09/046,901</b>      <b>24 March 1998 (24.03.98)</b>      <b>US</b></p> <p>(71) Applicant: <b>THE FANTASTIC CORPORATION [CH/CH];</b> <b>Bahnhofstrasse 12, CH-6301 Zug (CH).</b></p> <p>(72) Inventors: <b>KING, Martin, Cranston; Moosbachweg 12,</b> <b>CH-6300 Zug (CH). TROELSEN, Erik; Via Alla Chiesa 7,</b> <b>CH-6962 Viganello (CH). GULFI, Enrico; Via Campagna</b> <b>23, CH-6987 Caslano (CH).</b></p> <p>(74) Agent: <b>MICHELI, Michel, P.; Kirker &amp; Cie S.A., 122, rue de</b> <b>Genève, Case postale 324, CH-1226 Thonex (CH).</b></p>	<p>(81) Designated States: <b>AE, AL, AM, AT, AT (Utility model), AU,</b> <b>AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ</b> <b>(Utility model), DE, DE (Utility model), DK, DK (Utility model),</b> <b>EE, EE (Utility model), ES, FI, FI (Utility model),</b> <b>GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,</b> <b>KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG,</b> <b>MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE,</b> <b>SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA,</b> <b>UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE,</b> <b>LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ,</b> <b>BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,</b> <b>CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,</b> <b>NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,</b> <b>GN, GW, ML, MR, NE, SN, TD, TG).</b></p> <p><b>Published</b> <i>With international search report.</i></p>	

(54) Title: METHOD AND SYSTEM FOR BROADCAST TRANSMISSION OF MEDIA OBJECTS

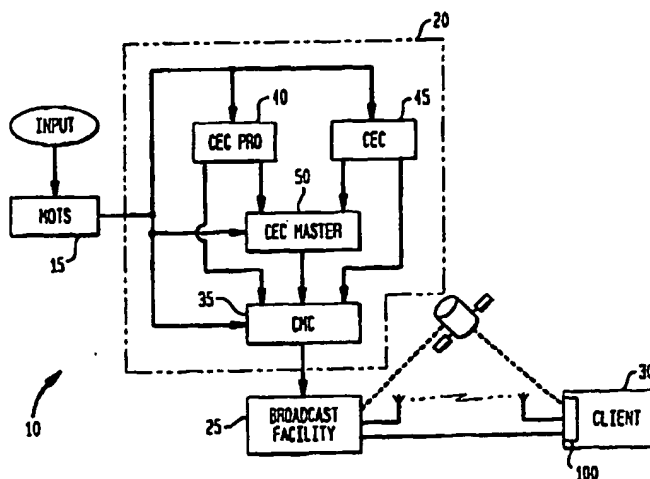

## (57) Abstract

A distributed broadcast system for receiving, processing, scheduling and broadcasting a wide variety of media objects is disclosed. The system comprises: a media object tracking system, a channel editing segment, a broadcast facility, and a plurality of end-user PCs. The media object tracking system receives media objects from a plurality of distinct sources and tracks their distribution, modification, and use. Associated with the media-object tracking system are a plurality of editing stations, where received media objects may be processed to create broadcast-ready material. The channel editing segment preferably comprises a plurality of channel editing centers (CECs) and one or more channel management centers (CMCs) which aggregate broadcast-ready media objects and schedule them for broadcast. Each scheduled media object is encoded in accordance with subscription information associated with the service to which the media object belongs. The encoded media object is multiplexed onto a time-division-multiplex channel of a broadcast bit stream. The broadcast facility transmits the encoded bit stream via a broadcast channel. Appropriately equipped end-user PCs receive the transmission and provide the end-user with access to those portions of the broadcast which the end-user is authorized to receive.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD AND SYSTEM FOR  
BROADCAST TRANSMISSION OF MEDIA OBJECTS

Background of the Invention

5           The quantity and variety of information available  
on the internet is vast. For many end-users, however,  
practical access to much of what the internet has to offer is  
foreclosed because they do not have an efficient way to  
download the available information. Traditionally, end-users  
10 have accessed the internet via telephone lines and other  
land-lines which have only a narrow bandwidth. Insufficient  
bandwidth causes long, frustrating waits, especially when  
large media objects, such as video clips, are downloaded from  
the internet onto the user's computer. A 2Mb video object,  
15 for example, may take as long as an hour to download.

Another drawback of the traditional internet, is  
that the wealth of available material is not well organized.  
Consequently, users must resort to search engines in order to  
identify internet sites that might be of interest to them.  
20 These search engines, however, are relatively slow and may  
fail to identify all sites that are in fact of interest to  
the user.

One possible solution to the bandwidth dilemma is  
to transmit information from the internet to users by  
25 broadcasting it to them. For example, each conventional  
analog television channel has sufficient bandwidth to  
transmit 40 Mbps, which is sufficient for many needs.  
Moreover, satellite and cable broadcasts may have a bandwidth  
as great as 240 Mbps. These large bandwidths largely relieve  
30 the bandwidth insufficiencies of the prior art.

But broadcast has its own difficulties. One  
important feature of the internet is that each content  
provider can control the content, timing, and target of every  
object that it transmits. By contrast, scheduling and  
35 distribution control in the broadcast environment is  
typically controlled by the entity that maintains and  
operates the broadcast facility. Moreover, broadcast

facilities have traditionally been employed to transmit a single type of media object, e.g., television programming. Thus, broadcasters do not have the capability to handle the many classes of media object, including video, audio, and data, available via the internet.

### Summary of the Invention

The present invention provides a distributed broadcast system for processing, scheduling, and broadcasting a wide variety of media objects. The media objects may comprise static objects such as data files or dynamic objects such as streaming video, audio, or data.

In a preferred embodiment, the broadcast system of the present invention comprises a media object tracking system, a channel editing segment, a broadcast facility, and a plurality of end-user PCs.

The media object tracking system receives media objects from a plurality of distinct sources and tracks their distribution, modification, and use. Associated with the media-object tracking system are a plurality of editing stations, where received media objects may be processed to create broadcast-ready material.

The channel editing segment preferably comprises a plurality of channel editing centers (CECs) and one or more channel management centers (CMCs) which aggregate broadcast-ready media objects and schedule them for broadcast. Each scheduled media object is encapsulated or encoded in accordance with subscription information associated with the service to which the media object belongs. The encoded media object is multiplexed onto a channel of a broadcast bit stream.

The broadcast facility transmits the encoded bit stream via a broadcast channel. Appropriately equipped end-user PCs receive the transmission and provide the end-user with access to those portions of the broadcast which the end-user is authorized to receive.

### Brief Description of the Drawings

The above objects and summary of the invention will be better understood when taken in conjunction with the following detailed description and accompanying drawings, in 5 which:

Fig. 1 is a block diagram of a preferred embodiment of the broadcast system of the present invention;

Fig. 2 is a block diagram of a preferred embodiment of the media object tracking system of the present invention;

10 Fig. 3 is a block diagram of a preferred embodiment of the broadcast scheduler of the present invention;

Fig. 4 is a preferred embodiment of a graphical user interface for the broadcast scheduler depicted in Fig. 3;

15 Fig. 5 is a block diagram of a preferred embodiment of a channel management center of the present invention;

Fig. 6 is a block diagram of a preferred embodiment of a master channel editing center of the present invention;

20 Fig. 7 is a block diagram of a preferred embodiment of a professional channel editing center of the present invention;

Fig. 8 is a block diagram of a preferred embodiment of a channel editing center of the present invention;

25 Fig. 9 is a preferred embodiment of a master channel editing center and a channel management center having cascaded schedulers; and

Fig. 10 is a block diagram of a preferred embodiment of an end-user PC of the present invention.

### 30 Detailed Description of the Preferred Embodiments

Fig. 1 is a block diagram of a preferred embodiment of the broadcast system of the present invention. As shown in Fig. 1, the broadcast system, designated generally by numeral 10, comprises: a media object tracking system (MOTS) 15, a channel editing segment 20, a broadcast facility 25, and a plurality of end-user PCs 30, only one of which is shown in Fig. 1. Channel editing segment 20 comprises a

channel management center (CMC) 35, a professional channel editing center (CEC Pro) 40, a channel editing center (CEC) 45, and a master channel editing center (CEC Master) 50.

Although Fig. 1 depicts only a single CEC Pro 40, CEC 45, CEC Master 50, CMC 35, and broadcast facility 25, it should be recognized that the system may preferably comprise one or more of each of these components.

Operation of broadcast system 10 will first be briefly described in connection with Fig. 1. The structure and operation of the components of broadcast system 10 will then be more fully described in connection with Figs. 2-10.

Typical data flow through broadcast system 10 is schematically represented by the arrows connecting blocks 15-50 in Fig. 1. Initially, MOTS 15 receives media objects, such as proprietary or public-domain audio, video, image, and text based works. One function of MOTS 15 is to track the distribution and usage of received media objects as they traverse the broadcast system. This tracking function is performed with the aid of a database that stores distribution and usage information concerning media objects received by MOTS 15. In addition, some received media objects may require editing or other processing before being ready for broadcast. Such media objects are transmitted to channel editing stations (CECs) connected to MOTS 15 where they are edited and prepared for broadcast. These and other features of MOTS 15 are more fully described below in connection with Fig. 2.

Once a media object is ready for broadcast, it is transmitted to a CEC or CMC for aggregation and broadcast scheduling. Media objects for broadcast may also be provided directly to a CEC or CMC without passing through and being processed by MOTS 15. Broadcast scheduling is performed by a scheduler resident in a CMC 35, CEC Pro 40, or CEC Master 50. A preferred embodiment of a scheduler 30 for use in the present invention is described in detail in connection with Figs. 3 and 4. A preferred embodiment of CMC 35 is described in connection with Fig. 5. A preferred embodiment of CEC

Master 50 is described in connection with Fig. 6. A preferred embodiment of CEC Pro 40 is described in connection with Fig. 7. CEC 45 does not comprise a scheduler and is therefore suitable for aggregation of media objects for broadcast, but not for broadcast scheduling. A preferred embodiment of CEC 45 is described in connection with Fig. 8.

As the scheduled broadcast time for a media object arrives, CMC 35 multiplexes the media object onto a channel in accordance with received scheduling instructions. The multiplexed signal is transmitted to a broadcast facility 25 for broadcast to end-user PCs 30. In the preferred embodiment of the invention described herein, the multiplexing technique employed is time-division multiplexing. However, the invention may also be practiced using numerous other multiplexing techniques such as frequency-division multiplexing or statistical multiplexing.

The components of broadcast system 10 will now be described in more detail in connection with Figs. 2-10.

Fig. 2 is a block diagram of a preferred embodiment of MOTS 15. As shown in Fig. 2, MOTS 15 preferably comprises an input desk 202 for receiving media objects from content providers. Input desk 202 is connected to a bus 204. Also connected to bus 204 are a MOTS database 206, and one or more channel editing stations (CESSs) 208-212, described in more detail below. CMC 35, CEC Pro 40, CEC 45, and CEC Master 50 are also connected to bus 204 via an interface 214.

Input desk 202 is adapted to receive many different types of media object such as images, video, or text. When a media object is received, it is assigned one or more object attributes (metadata) by input desk 202. The assigned attributes are representative of the character of the received object. For example, a particular media object might be assigned a first attribute representative of the fact that the object is video footage, and a second attribute representative of the fact that the object is suitable for viewing by children. Input desk 202 creates a new record in MOTS database 206 for each media object it receives. The

record comprises an identifier for the media object as well as the object attributes assigned to the object.

Although only a single input desk 202 is shown in Fig. 2, the system may comprise one or more input desks, each suitable for receiving and processing one or more types of media objects. Illustratively, each content provider could be provided with an input desk 202 for processing media objects received from the content provider. Input desks 202 may be located in remote locations and may be connected to the rest of MOTS 15 by a network.

In some cases, the media objects received by MOTS 20 may represent complete data, audio, or video objects that have been fully edited and are ready for broadcast. This may occur, for example, when the media objects are received from Disney (TM) or another large content provider. In that event, the media objects received by MOTS 15 are transmitted directly to a CEC or CMC for aggregation and scheduling, as described below.

In other cases, the media objects received by MOTS 15 may represent data, audio, or video objects that are not intended for broadcast as-is, but rather are to be edited and/or combined with other media objects to create, for example, multimedia objects. For example, a content provider might provide video footage of exotic animals with the intent that the footage be incorporated in a derivative multimedia object comprising text and video such as a children's encyclopedia. Editing may be performed manually or may be automated.

Editing of media objects received by MOTS 15 is preferably performed at channel editing stations 208-212, which are connected to bus 204 of MOTS 15 via links 216-220, respectively. Links 216-220 may be any suitable communication link for connecting channel editing stations 208-212 to MOTS bus 204, such as a wide area network or dedicated lines. This permits CESSs 208-212 to be located remote from MOTS bus 204, for example, in another country.



Typically, channel editing stations 208-212 are operated by content providers who produce broadcast-ready data, video, and audio objects. These objects may incorporate content created by others, such as content  
5 received by MOTS 15 via input desk 202 or other sources. Using channel editing stations 208-212, these content providers may access media objects received at input desk 202. The channel editing stations edit the received media objects and/or incorporate them into derivative works. As  
10 noted, editing may be performed by system operators or may be fully or partially automated. When a media object is modified or incorporated in a derivative media object, that fact is recorded in the object's record in MOTS database 206. Thus, in contrast to prior art internet systems, the system  
15 of the present invention is able to track the distribution, modification, and use of particular media objects, which provides many benefits. For example, tracking permits owners of media objects to police the use and distribution of their creations and better exploit intellectual property rights to  
20 which they may be entitled.

Another purpose of the data attributes is to ensure appropriate distribution of media objects to channel editing stations 208-212. For example, certain media objects may be suitable for adult viewing only, and will be assigned a data  
25 attribute representative of that fact. Any channel editing station designated to produce programming for children (e.g., station 210) will not be able to access media objects with this "adult" data attribute. Thus, in contrast to prior art internet schemes, the present invention is able to track and  
30 control the use and distribution of all received media objects, thus protecting the rights and limiting the liabilities of content providers, broadcasters, and end-users.

Once a media object is ready for broadcast, it is  
35 transmitted to a CEC or CMC for aggregation and broadcast scheduling. Broadcast scheduling is the process of assigning

broadcast parameters such as broadcast time, channel, and bandwidth to an object intended for broadcast.

Scheduling is necessary because the amount of data that can transmitted by a broadcast facility, although  
5 enormous, is not unlimited. Broadcast facilities typically transmit over particular frequency bands called channels. The rate at which a broadcast channel can transmit information (frequently measured in units of millions of bits per second (Mbps)) is related to the difference in frequency  
10 between the highest and lowest frequencies in the band, and is therefore often referred to as the bandwidth of the channel.

The bandwidth of a broadcast channel is frequently subdivided into two or more channels using a multiplexing  
15 technique, such as time-division multiplexing (TDM). In time-division multiplexing, each TDM channel is assigned a particular time interval for broadcast. This permits concurrent broadcast of two or more signals over a single broadcast channel. The bandwidth of a TDM channel is the  
20 capacity of the channel to transmit information and is typically measured in units of millions or thousands of bits per second. Of course, the total bandwidth of all TDM channels that make up the broadcast channel cannot exceed the total bandwidth of the broadcast channel.

25 Thus, the capacity of a broadcast facility to broadcast information is not unlimited. This finite capacity must be shared among all content providers desiring to broadcast media objects from the facility. It is therefore important to provide scheduling apparatus and methods for  
30 efficiently allocating particular portions of the available broadcast bandwidth to particular media objects to ensure timely and complete transmission of all media objects to be broadcast.

In a preferred embodiment, the present invention  
35 provides a distributed scheduling capability that permits scheduling of broadcasts to be performed at one or more of a plurality of scheduling locations. Typically, CEC Pro 40,

CEC Master 50, and CMC 35 will constitute scheduling locations. Each scheduling location is provided with a scheduler. A preferred embodiment of a scheduler is now described in connection with Fig. 3.

5           As shown in Fig. 3, a scheduler 300 preferably comprises a data memory 302, a video memory 304, and an audio memory 306, for storing broadcast-ready data objects, video objects, and audio objects, respectively. Scheduler 300 further comprises an attribute database 308, for storing  
10 attribute data (metadata) concerning broadcast parameters of the objects stored in memories 302-306. For example, for a video object to be transmitted, attribute database 308 might store the bandwidth required to transmit the object, the time at which the object is to be broadcast, the size and name of  
15 the object, and the intended audience for the object.

A processor 310 is connected to memories 302-306 and database 308. As described below, processor 310 manages broadcast scheduling of media objects stored in memories 302-306 as well as streaming media objects that may be  
20 dynamically transmitted via one or more lines 312, 314 and streaming interface 316. Attribute data for these dynamic objects may also be stored in attribute database 308. In a preferred embodiment, processor 310 comprises a software program running on a Windows NT (TM) or Windows 95 (TM) work  
25 station.

Scheduler 300 is responsible for scheduling broadcasts for particular blocks of bandwidth on specific TDM channels. Illustratively, a particular scheduler 300 might be responsible for scheduling broadcast content for 4 Mbps of  
30 bandwidth from 7:00:00 AM to 8:00:00 AM on March 14, 1998. Scheduler 300 allocates portions of this bandwidth to static objects stored in memories 302-306 and dynamic objects streaming via line 312 in accordance with the objects' attribute data stored in attribute database 308. Continuing  
35 with the above illustrative example, scheduler 300 might allocate 1.4 Mbps between 7:20:00 AM and 7:23:05 to broadcast a music video over a particular TDM channel that broadcasts

music videos during the morning hours. Alternatively, it might allocate 100kbs between 7:00:00 and 8:00:00 to establish a "carousel" that repeatedly plays out a 30 second audio file comprising the day's weather forecast.

5 Processor 310 may be programmed to automatically perform all broadcast scheduling. Alternatively, all or some of the scheduling may be performed by a system operator. In a preferred embodiment, manual scheduling is aided by a graphical user interface (GUI) 400 which permits the user to  
10 manipulate (using, e.g., a mouse) graphical icons representative of objects to be broadcast and to visually perceive the entire broadcast schedule for the bandwidth allocated to scheduler 300. A preferred embodiment of GUI 400 is shown in Fig. 4.

15 As shown in Fig. 4, GUI 400 preferably comprises a plurality of windows 402. Windows 402 graphically display the bandwidth allocation for a plurality of media objects 404 scheduled for broadcast.

For example, the bandwidth allocated to media  
20 object 404c is graphically represented as a rectangle in windows 402 having a height of 20 kb/s and a width of approximately 14 minutes. It should be noted that each rectangle 404 may represent a single data object for broadcast, or may, for example, be representative of a  
25 directory comprising a plurality of files. Alternatively, a rectangle may represent a recorded video or audio object, or a block of bandwidth allocated to streaming audio, video, or data.

In a preferred embodiment, the axes of one or more  
30 of windows 402 (i.e., time and bandwidth) are drawn to different scales in order to provide the system operator with differing perspectives of the broadcast schedule. For example, in the illustrative example depicted in Fig. 4, the scale of the time axis of window 402a is approximately ten  
35 times as great as that of window 402b. Thus, the system operator can view window 402a in order to understand the "big picture" (approximately a one-hour window of the broadcast

schedule), while focusing on window 402b in order to view the specifics of the broadcast schedule in ten second increments.

As described in more detail below, each of the media objects represented by rectangles 404 may belong to a particular service. In a preferred embodiment, the color of rectangles 404 may be representative of the service to which the media object associated with the rectangle belongs. For example, all media objects belonging to a particular service may be represented by rectangles that are red.

10           Scheduling information for the media objects graphically represented by rectangles 404 may also be numerically represented in a window 406. In the illustrative example shown in Fig. 4, window 406 displays quantitative and attribute information for media object 404c.

15           Window 406 preferably comprises a plurality of fields for storing information regarding a particular media object to be broadcast. Illustratively, window 406 may comprise the following fields:

1. a filename field, which stores the filename of  
20 the media object (e.g., C:\fbs\subchannel\test2.AVI).

2. a name field, which stores the name of the media object (e.g., sports).

3. a size field, which stores the size in kilobytes or megabytes of the media object (e.g., 16445.344  
25 kB).

4. a status field, which stores the file name or directory name to be transmitted (e.g., unknown).

5. a channel field, which stores the TDM channel on which the media object is to be broadcast (e.g., 99).

30           6. a subchannel field, which stores information representative of the service on which the file is to be streamed out (e.g., 0).

7. an ID field, which stores an identifier for the channel (e.g., 0).

35           8. a bandwidth field, which stores the bandwidth allocated to broadcast the media object.

9. a bandwidth position field, which stores the vertical offset relative to zero of the bandwidth allocated to the object (i.e., the location of the object in the pipe).
10. a start time field, and
- 5 11. a stop time field, which define the time period allocated to broadcast the media object (e.g., from 00:04:04 on November 20, 1996 to 00:17:47 on February 20, 1996).

In a preferred embodiment, a blank template having  
10 the same fields and arrangement as window 406 may be employed to schedule media objects for broadcast. In particular, by clicking on an appropriate icon, an operator may cause a blank window 406 to be displayed on the screen. The operator may then enter the broadcast attributes of the media object  
15 into the appropriate fields. When the operator clicks on OK area 408, GUI 400 establishes a new rectangle that graphically represents the broadcast attributes of the media object, and displays the rectangle in the appropriate windows 402.

20 Similarly, the broadcast attributes of a media object may be modified using window 406. In particular, an operator may call up a window 406 for any displayed media object 404 by clicking on the object. The operator may then update any field in window 406. GUI 400 then updates the  
25 stored broadcast attributes for the media object and, if appropriate, changes the shape and/or location of the rectangle that graphically represents the updated media object.

In a preferred embodiment, an operator may also  
30 directly modify certain broadcast attributes in a graphical manner. In particular, the user may click on any media object 404 and "drag" it to another available portion of bandwidth (i.e., to any blank space in a window 402). In this way, the user may graphically schedule all media objects  
35 to be broadcast.

The present invention may employ automated scheduling algorithms to optimize utilization of the

available bandwidth. A system operator may input information concerning a plurality of objects including static and streaming data, video, and audio to be broadcast, and scheduler 300 may determine a schedule for broadcasting the 5 plurality of items so as to efficiently use the available bandwidth.

In addition, the objects to be broadcast may be compressed prior to transmission and scheduled for broadcast in accordance with their bandwidth requirements in compressed 10 form. Decompression is performed by PC 30 when it receives the broadcast, thus permitting media objects to be broadcast in compressed form in a manner transparent to the end-user of PC 30.

A preferred embodiment of CMC 35 will now be 15 described in connection with Fig. 5. It is contemplated that CMC 35 will typically be operated by a broadcast service provider such as a television network. A significant fraction of the broadcast content managed by CMC 35 will therefore typically comprise professionally-produced media 20 objects from large content providers (e.g., Disney (TM)) with whom the broadcaster has an established relationship.

Turning to Fig. 5, CMC 35 preferably comprises a scheduler 300a, having the same architecture as the scheduler 300 described above in connection with Fig. 3. CMC 35 25 further comprises a media-object retrieval manager 502 which monitors attribute database 308 of scheduler 300a. When media-object retrieval manager 502 determines that the time for broadcasting a particular media object is approaching, it retrieves the attribute data for the object from database 308 30 of scheduler 300a.

Concurrently, media-object retrieval manager 502 instructs file transfer manager 504 to retrieve the media object to be broadcast from the appropriate memory 302-306 of scheduler 300a. File transfer manager 504 retrieves the 35 media object from one of memories 302-306, and provides the file to a subscription control manager 506b, via line 516.

Alternatively, if the object to be transmitted is a dynamic object such as streaming video, media-object retrieval manager 502 instructs interface 316 to pass the streaming video via line 314 directly to subscription control 5 manager 506b.

In a preferred embodiment, CMC 35 further comprises a subscription database 508 that stores billing and subscription information concerning media objects to be broadcast by broadcast system 10. This information is used 10 to control access by end-users to broadcast media objects that they receive, as described below.

In particular, the present invention contemplates parsing the universe of broadcast objects into a plurality of broadcast services. A broadcast service comprises a 15 collection of media objects that share a common subject matter or audience. For example, one broadcast service might focus on golf related programming while another might consist exclusively of childrens' programs.

Each media object to be broadcast is assigned to a 20 specific broadcast service by broadcast system 10. Subscription database 508 maintains a list of the broadcast service to which each media object belongs.

In a preferred embodiment, broadcast system 10 supports six different types or categories of broadcast 25 services. The first service category is "free to air services." Services belonging to this category may be received by clients at no cost and without registration or a return path connection to the content provider.

The second service category is "free subscribed 30 services." Clients must register to receive services belonging to this category, but registration is free. Subscription to broadcast services belonging to this category may require that the end-user have a return path connection to the content provider. For example, the end-user may be 35 required to subscribe to the service via a return connection to the content provider.



The third service category is "subscription services." End-users must register in order to receive services belonging to this category, and there is a fee for registering. Subscription to services belonging to this  
5 category may require that the end-user have a return path connection to the content provider.

The fourth service category is "pay-per-item." End-users must pay a one-time charge in order to receive broadcast services that belong to this service category.  
10 End-users may be required to have a return path connection to the content provider in order to receive services belonging to this service category.

The fifth service category is "open multimedia distribution platform." This platform can be used to provide  
15 both consumer and business services and interfaces to the network operating center through an IP multicast or other input. As those skilled in the art recognize, the term unicast refers to transmission of information to one site at time. In contrast, multicast refers to transmission of  
20 information to more than one site at a time. Preferably, the platform comprises an open software platform to provide a common interface to the content provider and end-user for all media broadcast categories. In a preferred embodiment, a common interface allows the seamless integration of new  
25 applications and content into the platform. One advantage of this platform is that it eases the porting of readily available services on other transport streams to DVB-S. For example, it enables real-time data services that are restricted to VBI, and audio/video streaming services.

30 The sixth service category is "additional services." Additional services preferably consist of services that provide interfacing to: conditional access systems, subscriber management systems, billing systems, NDIS drivers for PC broadcast receiver cards, and customized  
35 programs for the automation of content delivery and presentation. These interfaces are preferably standardized such that an interface to a PC card from a first manufacturer

uses the same generic instructions as an interface to a PC card from a second manufacturer.

One or more broadcast services may be bundled together to form subscription packages. In that event, a single subscription would entitle an end-user to receive all services included in the package. For example, an end-user who was a fan of many sports might subscribe to a sports package that would provide access to a variety of broadcast services each of which is related to a different sport.

10 CMC 35 further comprises one or more subscription control managers 506 including subscription control manager 506b whose function is to encapsulate or encode media objects in accordance with subscription information from subscription database 508, and to load the encapsulated or encoded media  
15 object onto TDM channels.

Specifically, recall that file transfer manager 504 retrieves the media object to be broadcast from the appropriate memory 302-306 of scheduler 300a and provides the media object to an output 516 where it is received by  
20 subscription control manager 506b. Alternatively, the media object to be broadcast is dynamically received by interface 316 and transmitted via line 314 to subscription control manager 506b. Subscription-information retrieval manager 510 then retrieves subscription information for the received  
25 media object from database 508 and transmits the information to subscription control manager 506b. Subscription control manager 506b encapsulates, encodes, or both encapsulates and encodes the media object in accordance with the subscription information received from database 508.

30 The encapsulation or encoding employed by the present invention may take many forms. For example, subscription control manager 506b may be programmed to identify the header and tail of a packet and wrap an additional protocol layer of subscription information around  
35 the packet.

Alternatively, the subscription information retrieved from subscription database 508 may comprise

instructions to encode the media object in accordance with particular encryption software. Only clients who have subscribed to the service, and thus have the corresponding decryption software, will be able to receive the broadcast  
5 object.

In an alternative embodiment, the subscription information may be embedded in the transmission bitstream for example by watermarking each data packet. In this alternative embodiment, the subscription information need not  
10 be added to the bitstream by subscription control manager 506b. The subscription information may be added to the data at any point in the system and may be added by the content provider or by another party.

As described below, use of encapsulation or  
15 encoding permits the system of the present invention to enable or disable receipt of particular services by particular end-users.

Subscription control manager 506b further comprises a protocol handler for loading the encoded media object onto  
20 an appropriate TDM channel in a digital format, in accordance with the broadcast attributes defined for the object by scheduler 300a. The encoded media object is then transmitted to service mixer 512 for multiplexing with other streams of broadcast data.

25 The bitstream output by subscription control manager 506b may consist of complete media objects transmitted one after another. Alternatively, subscription control manager 506b may be adapted to packetise received media objects, interleave the packets from a plurality of  
30 media objects and output the interleaved packets as a bit stream. For example, if two files are to be delivered to a user concurrently, but one of the files is three times as long as the other, the protocol handler might packetise the two files and then interleave the packets at a ratio of three  
35 packets from the first file for every one packet from the second.

In a preferred embodiment, CMC 35 further comprises a subscription control 506a. As described in more detail below, the purpose of subscription control 506a is to transmit updated subscription information to the subscription manager of PC 30. The subscription manager of PC 30 uses this subscription information to identify subscribed services which may be accessed by the end-user.

As further shown in Fig. 5, CMC 35 further comprises a subscription control 506c that may receive additional streams via a line 514 from other sources such as a CEC, and multiplexes them onto appropriate TDM channels for broadcast in accordance with broadcast attribute information received from the CEC. This feature of the present invention is described in detail below, after CEC Master 50 and CEC Pro 40 have been described.

In a preferred embodiment, a CMC 35 having a play-out of 5 Mbps is implemented as one or more software programs running on an HP Unix Server and three NT Workstations.

A preferred embodiment of CEC Master 50 is shown in Fig. 6. As will be recognized, the architecture of CEC Master 50 is the same as that of CMC 35. The size of each component, however, may differ since CEC Master 50 will typically have lower play-out bandwidths than CMC 35.

It is contemplated that CEC Master 50 will typically be maintained and operated by a bandwidth wholesaler, who purchases broadcast bandwidth in bulk from a broadcast service provider and resells segments of the bandwidth to others. Scheduling of the resold bandwidth may be administered using GUI 400 of scheduler 300b.

A preferred embodiment of CEC Pro 40 is now described in connection with Fig. 7. It is contemplated that CEC Pro 40 will typically be maintained and operated by a company that is not itself in the media or information-distribution business, but nevertheless requires an outlet to distribute data or video objects such as price lists, training videos, etc. In addition, the company might wish to broadcast streaming audio or video, e.g., to broadcast a live

press conference to its customers announcing the roll-out of a new product. Thus, the contemplated uses of CEC Pro 40 require that it be capable of storing and scheduling static media objects for broadcast and acting as an interface for streaming data, audio, or video.

Accordingly, as shown in Fig. 7, CEC Pro 40 is provided with a scheduler 300c, having the same architecture as scheduler 300 described above in connection with Fig. 3. In addition, CEC Pro 40 is provided with interfaces 702, 704, suitable for transmitting streaming video, audio, and data to a CEC Master 50 (via line 614) or CMC 35 (via line 514) for broadcast on a predesignated TDM channel.

In a preferred embodiment, CEC Pro 40 may be implemented as one or more software programs running on an NT (TM) Workstation.

A preferred embodiment of CEC 45 is shown in Fig. 8. As shown in Fig. 8, CEC 45 is provided with interfaces 802, 804 (similar to interfaces 702, 704 of CEC Pro 40) suitable for transmitting streaming video and audio to a CEC Master 50 or CMC 35 for broadcast via a predesignated TDM channel. CEC 45 differs from CEC Pro 40, however, in that it does not comprise a scheduler 300. Instead, it comprises object storage 806, suitable for storing video, audio, and data media objects. CEC 45 is thus unable to schedule files for broadcast. It can, however, transmit stored files at a predetermined time to a CEC Master 50 or CMC 35 for multiplexing onto a predesignated TDM channel.

As noted above, CMC 35 has the capacity to receive data streams via line 514 from other sources, such as a CEC, and merge them onto appropriate TDM channels for broadcast in accordance with broadcast attribute information received from the CEC. This feature of the present invention permits distributed scheduling of broadcast bandwidth at a plurality of sites and by a plurality of service and content providers. It is also one way that the system permits many different types of transmissions to be merged into a single stream for transmission via a single broadcast channel.

For example, CMC 35 may sell a block of bandwidth on one or more TDM channels to a CEC Master 50, who may in turn resell segments of this bandwidth to one or more CEC Pros 40. One of the CEC Pros 40 may use its bandwidth  
5 segment to transmit video, while a second CEC Pro 40 may use its bandwidth segment to transmit data files. As discussed above, scheduling for each bandwidth segment is performed at the remote CEC Pro that purchased the segment.

The scheduled bandwidth segments are then  
10 transmitted as a broadcast-ready bit stream by their respective CEC Pros 40 to CEC Master 50 (via, e.g., line 614) where they may be mixed with other streams representing other bandwidth segments that were sold by CEC Master 50. Subscription control 606c of CEC Master 50 places the  
15 received stream onto an appropriate TDM channel, as described above.

This multiplexed stream is transmitted to CMC 35 where it is mixed with other streams of broadcast-ready content received from other CEC Masters 50 or generated by  
20 CMC 35 itself.

In an alternative embodiment, two or more schedulers 300 of a CEC Pro 40, CEC Master 50, and CMC 35, may be arranged in a cascade. Fig. 9 illustrates one such possible cascade, in which scheduler 300b of CEC Master 50 is  
25 cascaded with scheduler 300a of CMC 50. As in the first preferred embodiment described above, scheduler 300b of CEC Master 50 stores media objects and associated scheduling and subscription information scheduled for broadcast during the bandwidth for which CMC 50 is responsible. As the time for  
30 broadcast of a particular media object approaches, CEC Pro 40 retrieves the object and its associated scheduling information and transmits them to CEC Master 50, along with any subscription information associated with the media object. CEC Master receives the media object and its  
35 associated scheduling and subscription information and updates its scheduling and subscription databases in accordance therewith. Preparation of the media object as an

encoded bit stream then proceeds as described above in connection with the first preferred embodiment.

The broadcast-ready bit stream output by CMC 35 is transmitted to broadcast facility 25. As schematically shown in Fig. 1, broadcast facility 25 broadcasts the received stream via one or more broadcast technologies, such as traditional television broadcast, cable-TV broadcast, or satellite broadcast. Other broadcast environments known to those skilled in the art may also be employed.

10 The broadcast transmission is received by end-user PC 30. A preferred embodiment of PC 30 will now be described in connection with Fig. 10. In the preferred embodiment described herein, the device employed by the end-user to receive the broadcast media objects is a PC 30. However, the invention may also be practiced using other devices for receiving the broadcast media objects, such as set-top cable boxes, provided that the devices comprise adequate hardware and software to achieve the functionality described below.

PC 30 preferably comprises a receiver 100 connected to a layered protocol such as TCP/IP stack 112 via NDIS drivers 110. TCP/IP stack 112 is connected to a subscription manager 114 whose purpose is to control access by the end-user to received information and to maintain a list of information services for the end-user.

25 Receiver 100 preferably comprises one or more components 102-108 adapted to receive broadcasts from broadcast facility 25. Receiver 100 may comprise an antenna 102 for receiving Rf television transmissions, a CATV modem 104 for receiving cable-TV transmissions, a satellite receiver 106 for receiving satellite transmissions, and/or a modem 108 for receiving transmission via a data link, depending on the broadcast technology employed by broadcast facility 25.

As noted, receiver 100 is coupled to a protocol stack such as TCP/IP stack 112 via NDIS drivers 110. In a preferred embodiment, TCP/IP stack 112 may comprise the Winsock (TM) TCP/IP stack manufactured by Microsoft

Corporation. As known to those skilled in the art, one purpose of TCP/IP stack 112 is to examine the arriving data packets that make up a transmitted file or other media object to determine that all packets that make up the file have been received, and that they have been received in the correct order.

Once TCP/IP stack 112 verifies accurate reception of a TCP/IP communication, the communication is transmitted to subscription manager 114 which determines the subscription and service to which the communication belongs. Subscription manager 114 then determines whether or not PC 30 is authorized to receive the transmissions belonging to the identified service, and if authorized, whether the service has been enabled by the end-user.

Specifically, subscription manager 114 preferably comprises a software program running in the background of end-user PC 30. When desired, however, the end-user may maximize subscription manager 114 and have it display the list of services which end-user PC 30 is authorized to receive, i.e., all services included within subscription packages to which the end-user has subscribed. The end-user may then manually enable or disable services within a subscription package. For each authorized subscription package, subscription manager 114 maintains a record of the services that have been enabled and disabled by the end-user.

Then, when a communication is received, subscription manager 114 first determines whether the transmission belongs to a service to which the end-user has subscribed. Subscription manager 114 typically makes this determination by examining the received communication and determining whether it has the subscription information necessary to decode or unencapsulate the transmission.

As noted above, use of encapsulation or encoding permits the system of the present invention to enable or disable receipt of particular services by particular end-users. In a preferred embodiment, the system may enable particular PCs 30 to receive particular services by



broadcasting a subscription message addressed to all end-user PCs that have subscribed to the service. The message preferably comprises information concerning the particular times and channels on which the service will be broadcast and  
5 may also include information on the encapsulation protocol employed to encapsulate the transmission. If the service is encrypted, the subscription message may comprise information necessary to decrypt the transmission, as well. With this information, PC 30 is able to identify broadcast  
10 transmissions belonging to the service, strip off the encapsulation information, de-encrypt the transmissions (if necessary), and provide the content of the transmissions to the end-user, as described in more detail below.

Disabling of a particular service can be  
15 accomplished by including a timestamp in the subscription message instructing PCs 30 to delete the subscription message from their memories (or instructing PCs 30 not to use the information contained in the service parameter message), after a certain time period. Alternatively, the system may  
20 alter the channels and times for broadcast of particular services so that continued receipt of these services requires additional service parameter information not available to PCs 30 that are to be disabled from receiving the service. In addition, if the service is encrypted, specific PCs 30 may be  
25 disabled by modifying the encryption and not transmitting an updated subscription message concerning the new encryption to the disabled PCs 30. A service may also be disabled on one or more particular PCs 30 by addressing a disable-service message for the service to the particular PCs 30 which are to  
30 be removed from the service.

As noted, subscription messages to enable/disable particular services may be addressed to specific PCs 30. In particular, each PC 30 may be assigned a unique address. Subscription messages comprising the addresses of particular  
35 PCs 30 are transmitted that instruct each addressed PC 30 to enable and/or disable particular services in the manner described above. The unique address is preferably

implemented in hardware to avoid users configuring multiple PCs 30 to have the same address. When subscription manager 114 recognizes a subscription message addressed to its PC 30, it updates the subscription information in accordance with  
5 the contents of the received message.

Alternatively, instead of addressing subscription information to particular PCs 30, the system may regulate access to subscription information in other ways. For example, the subscription information may be encrypted or  
10 encapsulated before broadcast so that only PCs 30 with the proper decryption on deencapsulation information are able to receive the subscription information. Also, the subscription information may be broadcast at a specific time and on a specific channel known only to those PCs 30 that have  
15 subscribed to the service to which the subscription information pertains.

As noted above, in some embodiments end-users subscribe to services via a return connection to the content provider. In other preferred embodiments, end-users may  
20 subscribe to services in other ways. For example, an end-user may subscribe to a service by purchasing a disk or other storage medium comprising the necessary subscription information to receive the service.

This technique for distributing subscription  
25 information may be employed to link service-subscriptions to the sale of related (or other) items. Illustratively, a distributor of music CDs of a particular performer might package the CD together with a subscription to a live concert by the performer on a certain date in the future. To do so,  
30 the distributor would provide purchasers of the CD with appropriate subscription information to be loaded by the purchaser onto the purchaser's PC 30. The subscription information may be located on the CD itself or on another storage medium provided to the purchaser either at the time  
35 of sale or at a subsequent time. Alternatively, the subscription information may be broadcast to end-users who have purchased the performer's CD. As described above, the

subscription information may, for example, comprise decryption software or other appropriate subscription information such as encapsulation information.

Thus, the present invention provides a system that  
5 is capable of enabling and disabling the receipt of particular services by end-users without requiring any return connection to the end-users. In other words, the present invention provides a transmission system that can employ unidirectional transmissions to limit receipt of particular  
10 portions of a transmission to specific end-users.

If the communication belongs to a subscribed service, subscription manager 114 then determines whether or not the end-user has enabled the service.

Assuming the service is both subscribed and  
15 enabled, subscription manager 114 next determines whether the received packet is part of a static media object such as a file or a dynamic media object such as a streaming data transmission. If the packet is part of a file, subscription manager 114 transmits the packet to file receiver 116.  
20 Similarly, if the packet is part of a streaming data transmission, subscription manager 114 transmits the packet to streaming data receiver 118.

File receiver 116 is connected to an I-cache proxy server 120 which manages an HTTP cache 122. In a preferred  
25 embodiment, HTTP cache 122 stores all received internet data. The user may then send a URL request to the file and gain access to its contents. Alternatively, the received information may be stored in a different memory and may be accessed using a browser.

30 HTTP cache 122 may be adapted to manage the incoming data in a large number of ways. Illustratively, cache 122 may be programmed to overwrite older data as new data is received, or may be programmed to cease storage of incoming information once the amount of information stored in  
35 cache 122 reaches a threshold.

Streaming data receiver 118 is connected to a real-time data interface 124 which manages play-out of the

streaming data to an output port for display to the end-user of PC 30. In some circumstances, play-out may be via an additional interface, such as a DDE interface, Excel (TM), etc. Real-time data interface 124 is connected to a real-time database 126 which may temporarily store the received streaming data during play-out.

PC 30 may further be provided with several software tools, including an HTTP or web browser such as a media surfer (TM) 128 and internet explorer (TM) 130, to aid the end-user in navigating the received files and streaming data.

In a preferred embodiment, end-user PC 30 comprises a plurality of software programs running on a PC having, as minimum requirements, 16 Mb of RAM, 100 Mb of disk cache, and a 100 MHz Pentium (TM) processor. In addition, PC 30 preferably comprises an ISA card having a continuous data rate of approximately 1 Mbps and a PCI card having a continuous data rate of approximately 4 Mbps. Other system configurations may alternatively be employed.

Thus, as described above, the present invention provides a common interface for transmitting any type of media object via any broadcast environment. It thus permits the merging and transmission of a wide variety of both static and dynamic audio, video, and data objects in a manner that provides control over broadcast parameters and regulation of the end-users enabled to receive the transmitted material.

While the invention has been described in conjunction with specific embodiments, it is evident that numerous alternatives, modifications, and variations will be apparent to those skilled in the art in light of the foregoing description.

Claims

1. A broadcast system, comprising:
  - (1) a broadcast facility;
  - (2) a channel management center, comprising:
    - 5 (a) a first scheduler, comprising:
      - (i) a first processor;
      - (ii) a first memory storing a first plurality of media objects, and
      - (iii) a second memory storing first attribute
    - 10 data representative of broadcast attributes of the first plurality of media objects;
    - (b) a first media-object retrieval manager having access to the stored first plurality of media objects and first broadcast-attribute data and adapted to coordinate
    - 15 loading of objects from the first plurality of media objects onto multiplex channels in accordance with the first broadcast-attribute data;
    - (c) a first subscription database storing subscription information defining at least one broadcast
    - 20 service; and
    - (d) means for modifying the one or more first media objects in accordance with the subscription information stored in the subscription database.
- 25 2. The system of claim 1, further comprising:
  - (3) a channel editing center, comprising:
    - (a) a second scheduler, comprising:
      - (i) a second processor;
      - (ii) a third memory storing a second
      - 30 plurality of media objects, and
      - (iii) a fourth memory storing second attribute data representative of broadcast attributes of the second plurality of media objects;
      - (b) a second media-object retrieval manager having
      - 35 access to the stored second plurality of media objects and second broadcast-attribute data and adapted to coordinate loading of objects from the second plurality of media objects

onto multiplex channels in accordance with the second broadcast-attribute data;

(c) a second subscription database storing subscription information defining at least a second broadcast service; and

(d) means for modifying objects from the second plurality of media objects in accordance with the subscription information stored in the second subscription database;

10 (e) a multiplexer having a first input, a second input, and a first output, wherein the first input of the multiplexer is adapted to receive a bitstream representative of objects from the first plurality of media objects and the second input of the multiplexer is adapted to receive a  
15 bitstream representative of objects from the second plurality of media objects, and the output of the multiplexer is coupled to the broadcast facility.

3. The system of claim 2, wherein the play-out of the  
20 channel management center has a finite bandwidth, and wherein the broadcast scheduling for at least some of the finite bandwidth is performed by the second scheduler.

4. The system of claim 2, wherein the channel management  
25 center is located remote from the channel editing center.

5. The system of claim 2, wherein the channel editing center can be operated from a remote location.

30 6. The system of claim 1, wherein the data attribute database is located remote from the media object storage.

7. The system of claim 1, wherein the channel management center can be operated from a remote location.

35

8. The system of claim 1, wherein the scheduler further comprises a graphical user interface for graphically scheduling the broadcast of media objects.

5 9. The system of claim 1, further comprising a media object tracking system, comprising:

an input desk for receiving media objects having different formats and assigning to each received media object one or more data attributes representative of the media

10 object;

a tracking database comprising a plurality of records, each record storing the data attributes associated with a media object and further storing distribution, use, and modification information pertaining to the media object;

15 a media-object tracking tool adapted to track the distribution, use and modification of media objects, and further adapted to update the tracking database in accordance with collected tracking information.

20 10. The system of claim 9, further comprising a channel editing station, the channel editing station being connected to both the input desk and the tracking database.

11. A broadcast system, comprising:

25 (1) a broadcast facility;

(2) a channel management center, comprising:

(a) a first scheduler, comprising:

(i) a first processor;

(ii) a first memory storing a first plurality

30 of media objects, and

(iii) a second memory storing first attribute data representative of broadcast attributes of the first plurality of media objects;

(b) a first media-object retrieval manager having  
35 access to the stored first plurality of media objects and first broadcast-attribute data; and

(c) a first file transfer manager coupled to the media object retrieval manager and the first scheduler, and adapted to receive one or more of the first media objects from the scheduler in accordance with instructions issued by  
5 the first media object retrieval manager,

(d) a first subscription database storing subscription information defining at least one broadcast service;

(e) a first subscription control manager coupled to  
10 the first file transfer manager and the first subscription database and adapted to receive the one or more first media objects from the first file transfer manager and to modify the one or more first media objects in accordance with the subscription information stored in the subscription database,  
15 the first subscription control manager having at least one output, and being adapted to provide the received media object as part of a bit stream in a predetermined digital format to the at least one output;

(3) a channel editing center, comprising:

20 (a) a second scheduler, comprising:

(i) a second processor;

(ii) a third memory storing a second plurality of media objects, and

(iii) a fourth memory storing second attribute  
25 data representative of broadcast attributes of the second plurality of media objects;

(b) a second media-object retrieval manager having access to the stored second plurality of media objects and second broadcast-attribute data; and

30 (c) a second file transfer manager coupled to the second media-object retrieval manager and the second scheduler, and adapted to receive one or more of the second media objects and its associated broadcast-attribute data from the scheduler in accordance with instructions issued by  
35 the first media object retrieval manager, the second file transfer manager having an output, and being adapted to



provide the received media object and associated broadcast-attribute data to the output,

wherein the output of the second file transfer manager is coupled to an input of the first scheduler, and the first  
5 scheduler is adapted to receive the media object and store it in the first memory, and to receive the associated broadcast-attribute data and to store it in the second memory.

12. A broadcast system, comprising:

- 10 (1) a broadcast facility;
- (2) a channel management center, comprising:
  - (a) a first scheduler, comprising:
    - (i) a first processor;
    - (ii) a first memory storing a first plurality  
15 of media objects, and
    - (iii) a second memory storing first attribute data representative of broadcast attributes of the first plurality of media objects;
  - (b) a first media-object retrieval manager having  
20 access to the stored first plurality of media objects and first broadcast-attribute data;
  - (c) a first file transfer manager coupled to the media object retrieval manager and the first scheduler, and adapted to receive one or more of the first media objects  
25 from the first scheduler in accordance with instructions issued by the first media object retrieval manager;
  - (d) a first subscription database storing subscription information defining at least one broadcast service;
  - 30 (e) a first subscription control manager coupled to the first file transfer manager and the first subscription database and adapted to receive the one or more first media objects from the first file transfer manager and to modify the one or more first media objects in accordance with the  
35 subscription information stored in the subscription database; and

(f) a multiplexer having a first input, a second input, and a first output, wherein the first input of the multiplexer is coupled to an output of the subscription control manager, and the first output of the multiplexer is  
5 coupled to the broadcast facility.

13. The system of claim 12, further comprising:

(3) a channel editing center, comprising:

(a) a second scheduler, comprising:

10 (i) a second processor;  
(ii) a third memory storing a second plurality of media objects, and  
(iii) a fourth memory storing second attribute data representative of broadcast attributes of the second  
15 plurality of media objects;

(b) a second media-object retrieval manager having access to the stored second plurality of media objects and second broadcast-attribute data;

(c) a second file transfer manager coupled to the  
20 second media-object retrieval manager and the second scheduler, and adapted to receive objects from the plurality of second media objects from the second scheduler in accordance with instructions issued by the second media-object retrieval manager;

25 (d) a second subscription database storing subscription information defining at least a second broadcast service; and

(e) a second subscription control manager coupled to the second file transfer manager and the second  
30 subscription database and adapted to receive the one or more second media objects from the second file-transfer manager and to modify the one or more second media objects in accordance with the subscription information stored in the second subscription database;

35 wherein the output of the second subscription control manager is coupled to the second input of the multiplexer.

14. The system of claim 12, wherein the second subscription control manager is coupled to the second input of the multiplexer via a third subscription control manager.

5 15. The system of claim 12, wherein the first and second subscription control managers are adapted to packetise the received media object and wherein the bit stream provided by the subscription control managers comprises digital data from a plurality of the resulting packets.

10

16. The system of claim 12, wherein each subscription control manager is adapted to packetise at least two media objects, and is further adapted to interleave the resulting packets so that the first packet of the first media object is  
15 transmitted at practically the same time as the first packet of the second media object, and the last packet of the first media object is transmitted at practically the same time as the last packet of the second media object.

20 17. The system of claim 12, wherein the play-out of the channel management center has a finite bandwidth, and wherein the broadcast scheduling for at least some of the finite bandwidth is performed by the second scheduler.

25 18. The system of claim 12, wherein the channel management center is located remote from the channel editing center.

19. The system of claim 12, wherein the data attribute database is located remote from the media object storage.

30

20. The system of claim 12, wherein the channel management center can be operated from a remote location.

21. The system of claim 12, wherein the channel editing  
35 center can be operated from a remote location.

22. The system of claim 12, wherein at least of the schedulers further comprises a graphical user interface for graphically scheduling the broadcast of media objects.

5 23. The system of claim 12, further comprising a media object tracking system, comprising:

an input desk for receiving media objects having different formats and assigning to each received media object one or more data attributes representative of the media

10 object;

a tracking database comprising a plurality of records, each record storing the data attributes associated with a media object and further storing distribution, use, and modification information pertaining to the media object;

15 a media-object tracking tool adapted to track the distribution, use and modification of media objects, and further adapted to update the tracking database in accordance with collected tracking information.

20 24. The system of claim 23, further comprising a channel editing station, the channel editing station being connected to both the input desk and the tracking database.

25

30

35

FIG. 1

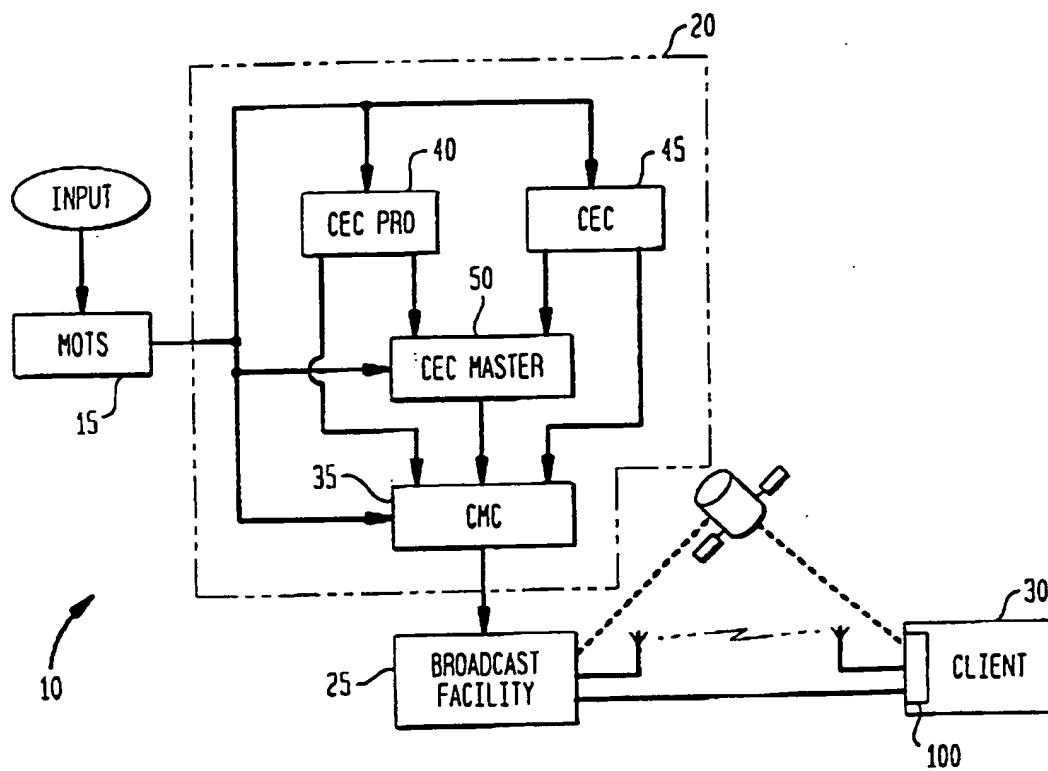


FIG. 2

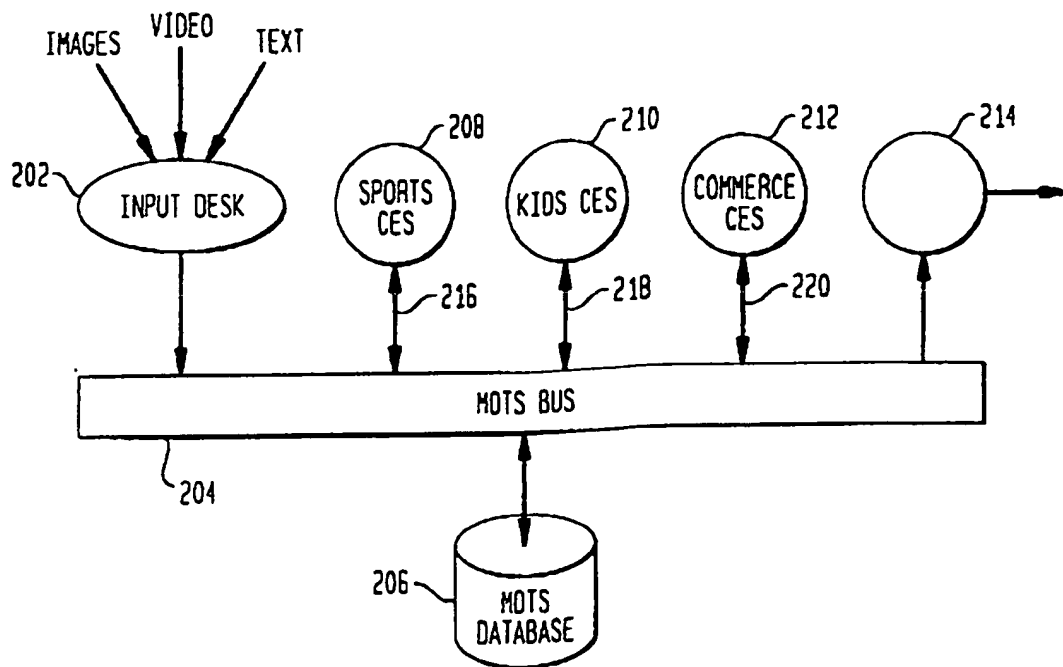


FIG. 3

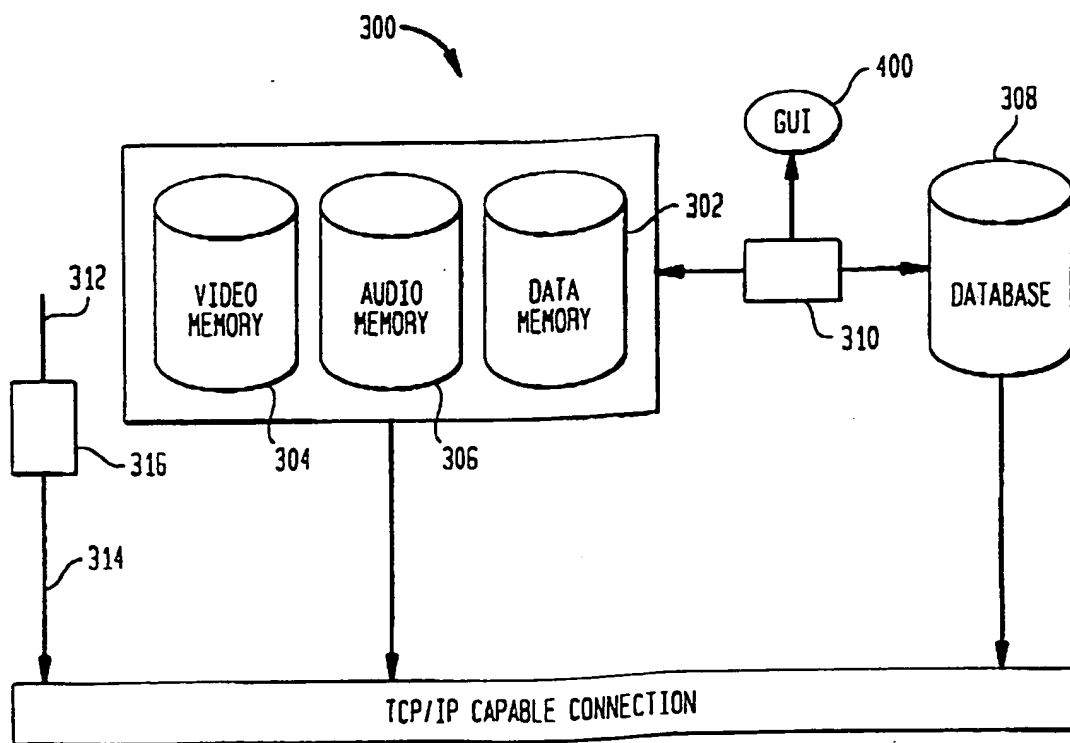


FIG. 4

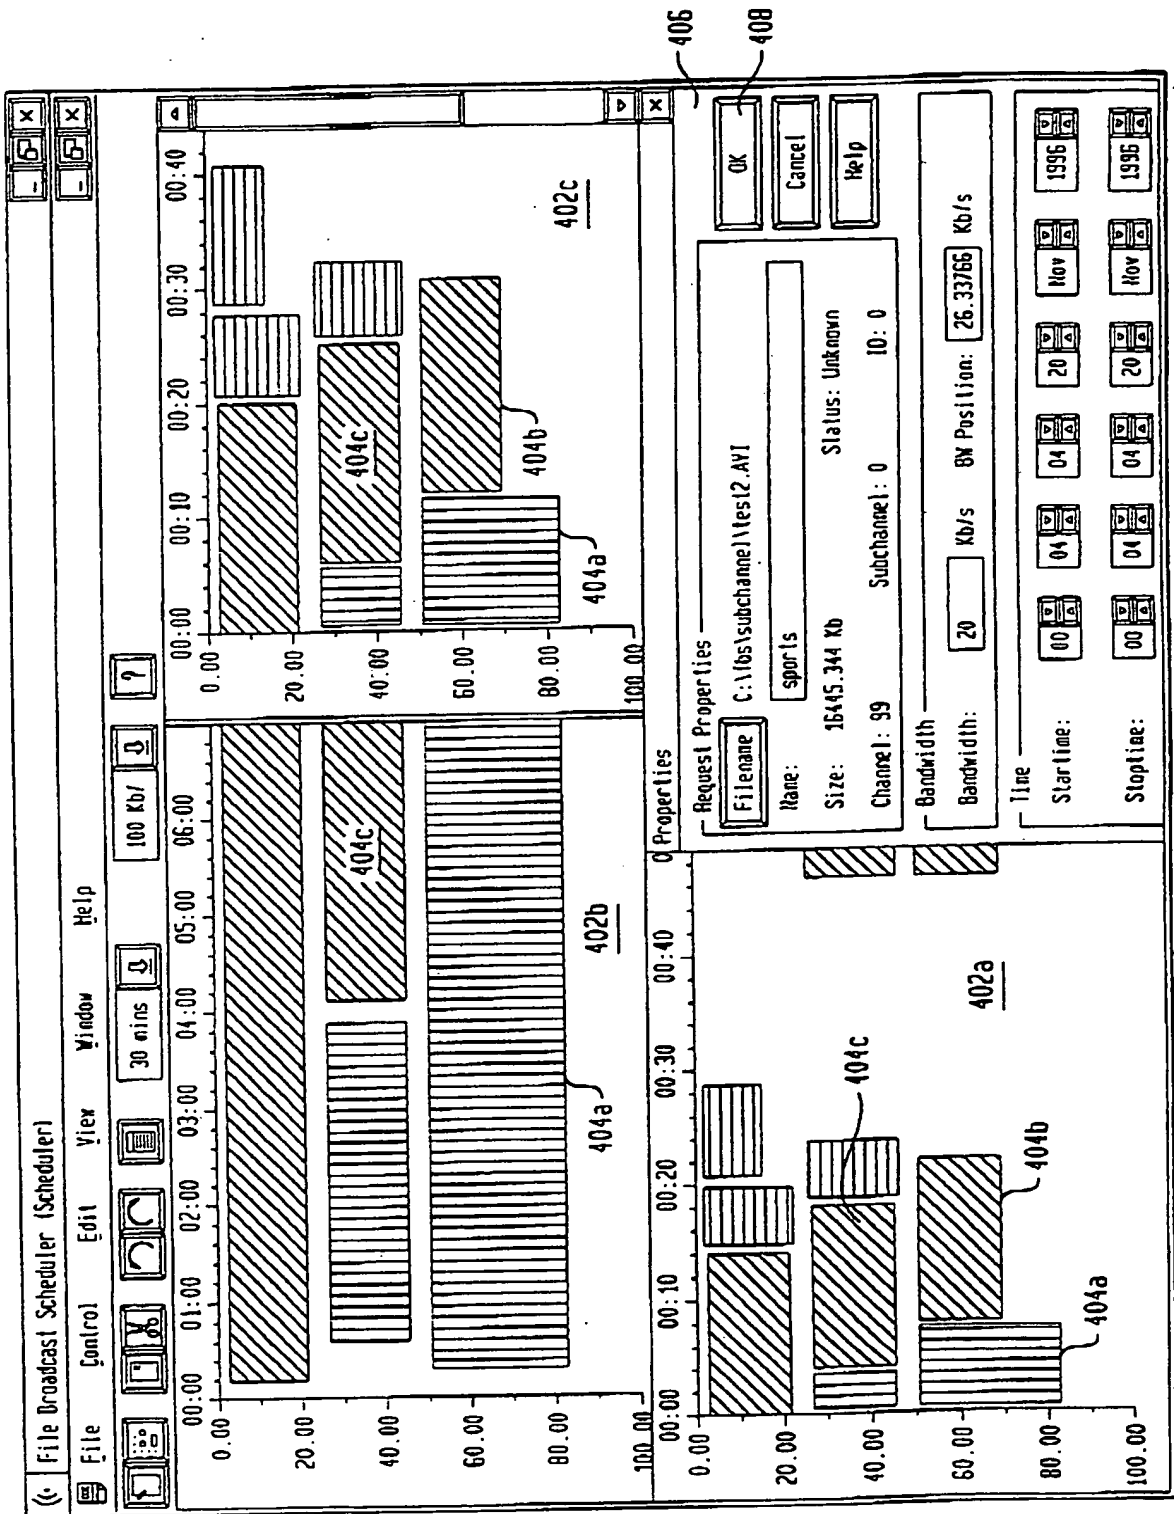


FIG. 5

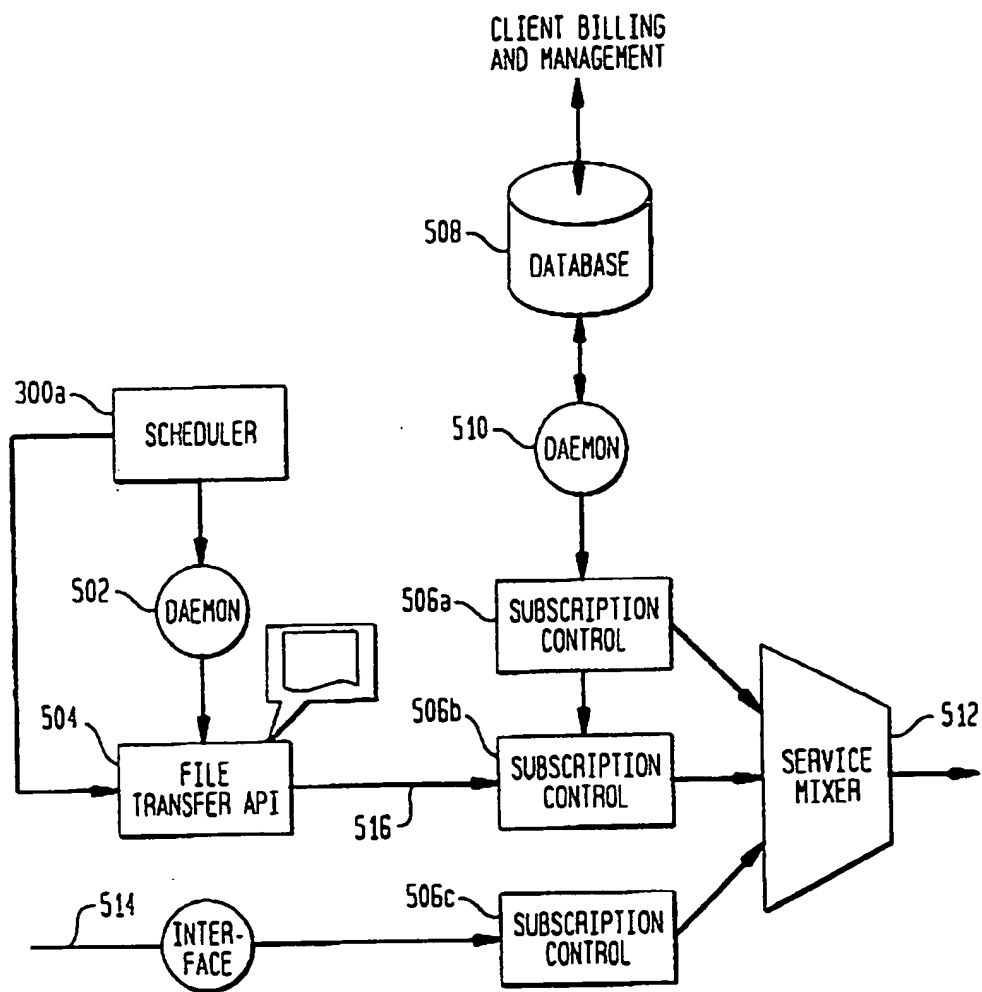




FIG. 6

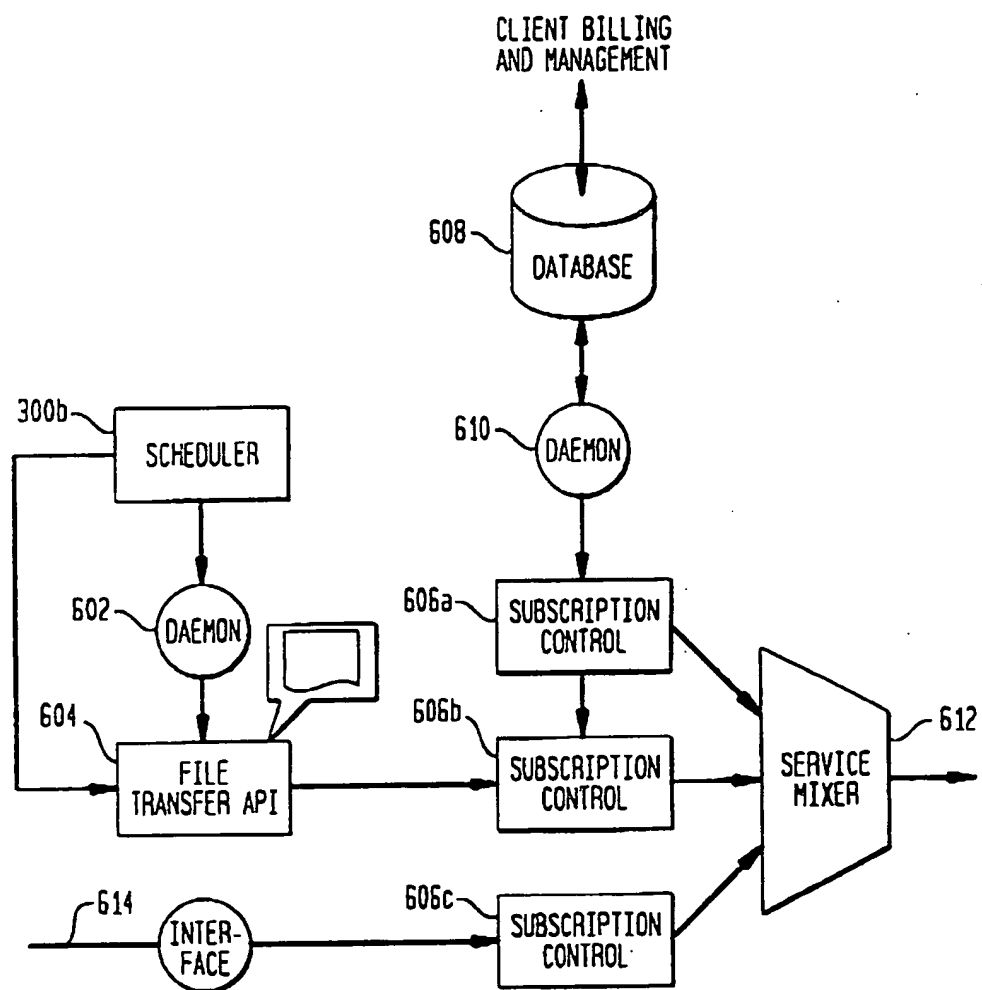


FIG. 7

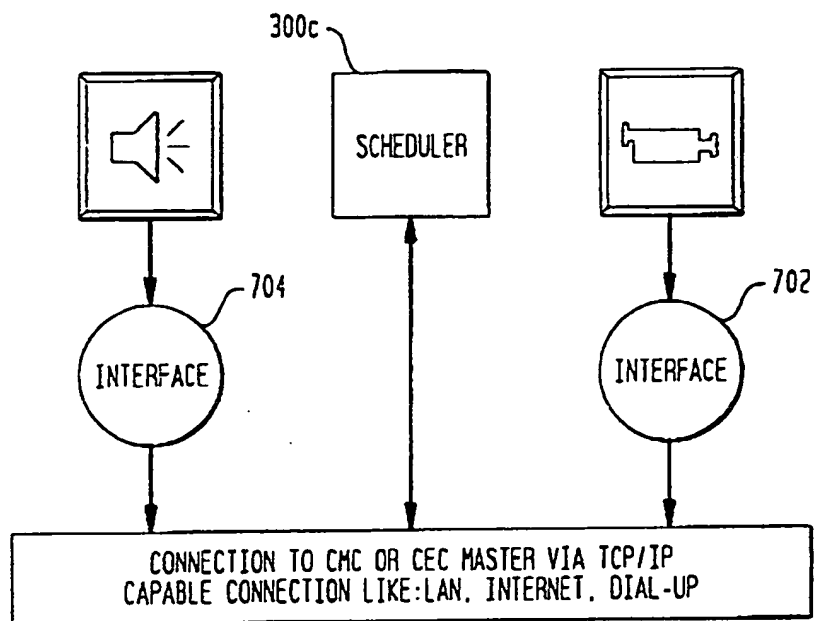


FIG. 8

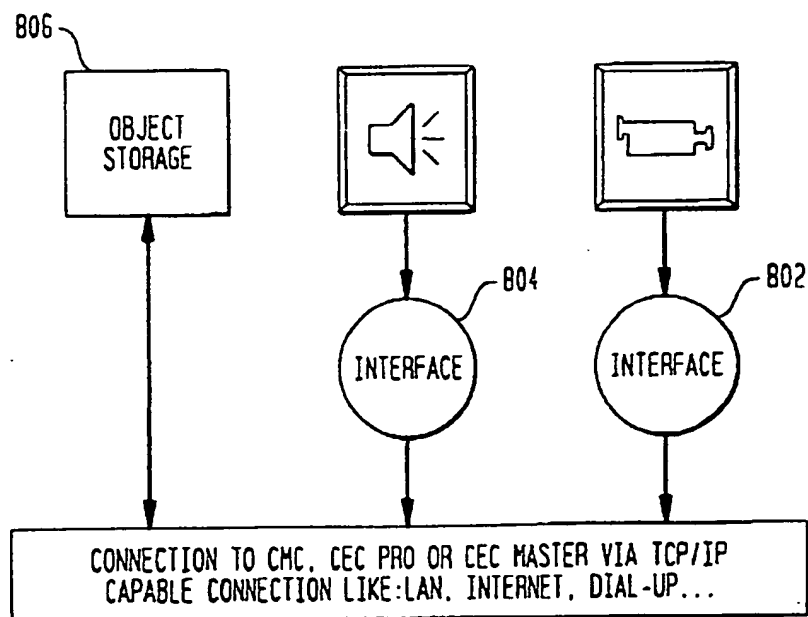
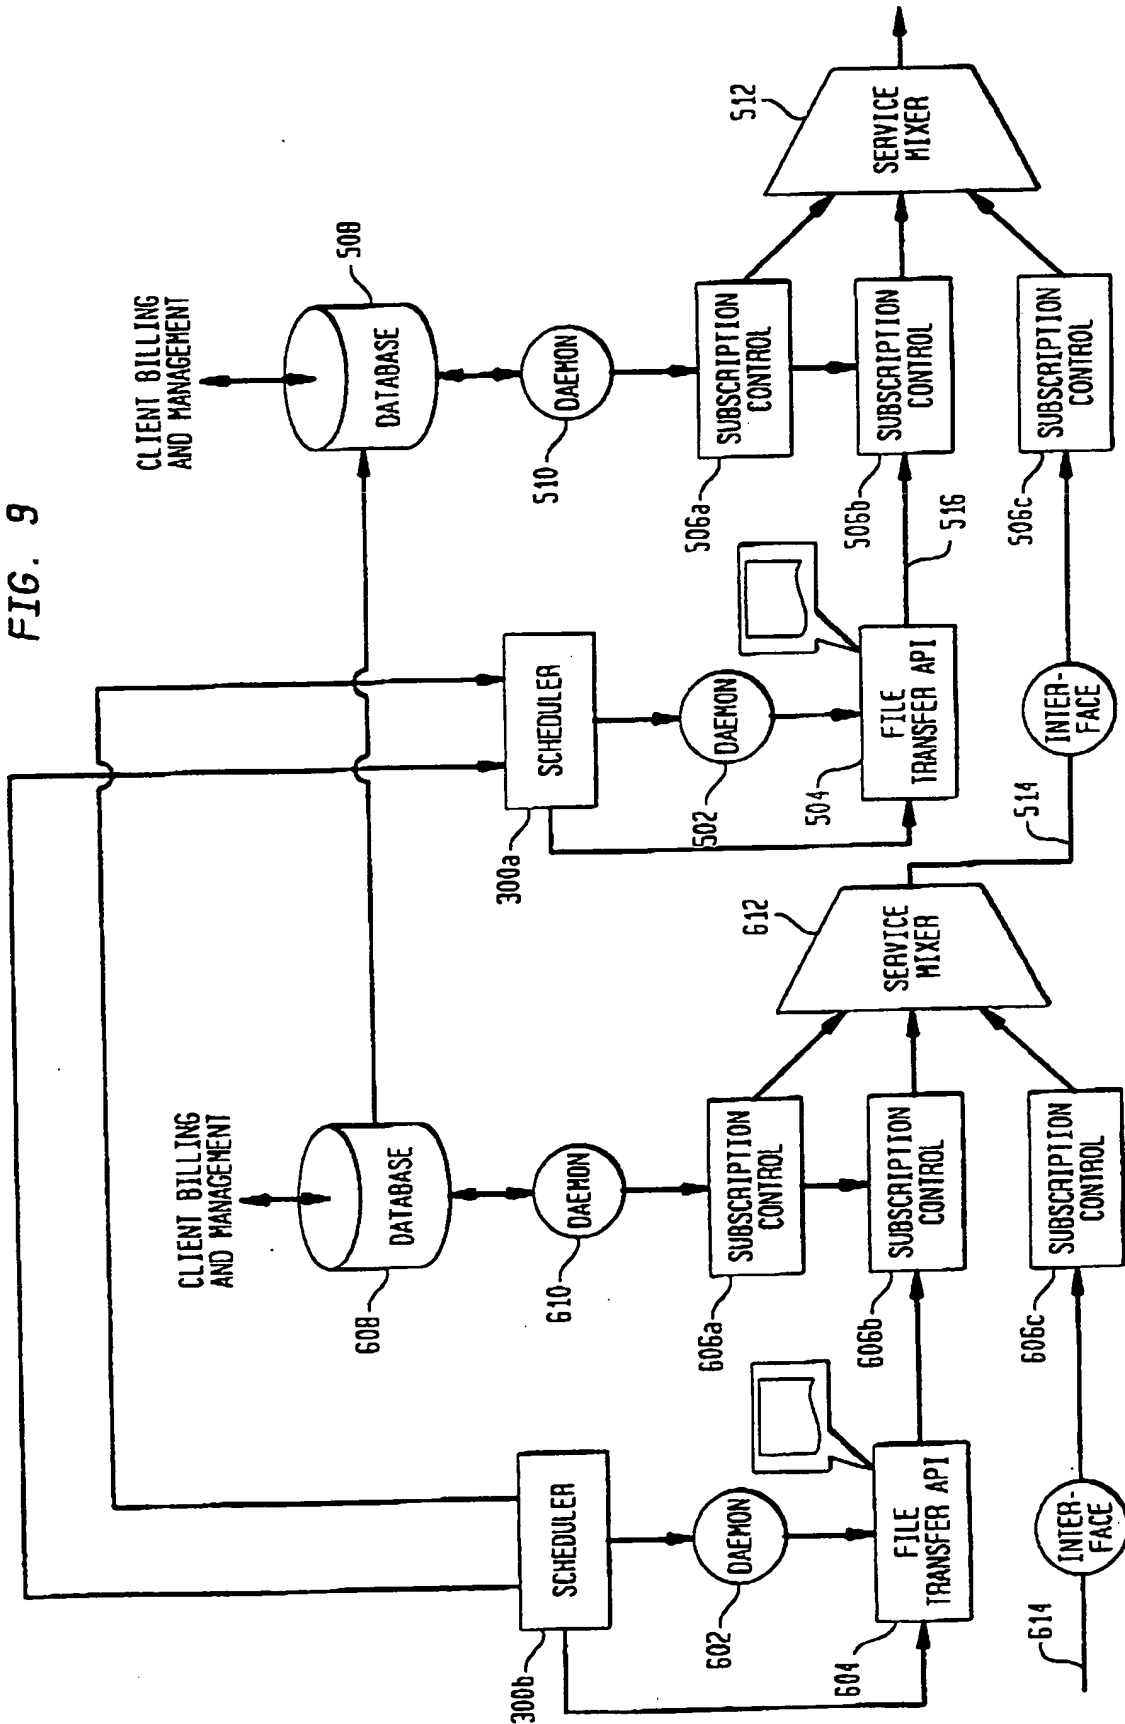


FIG. 9



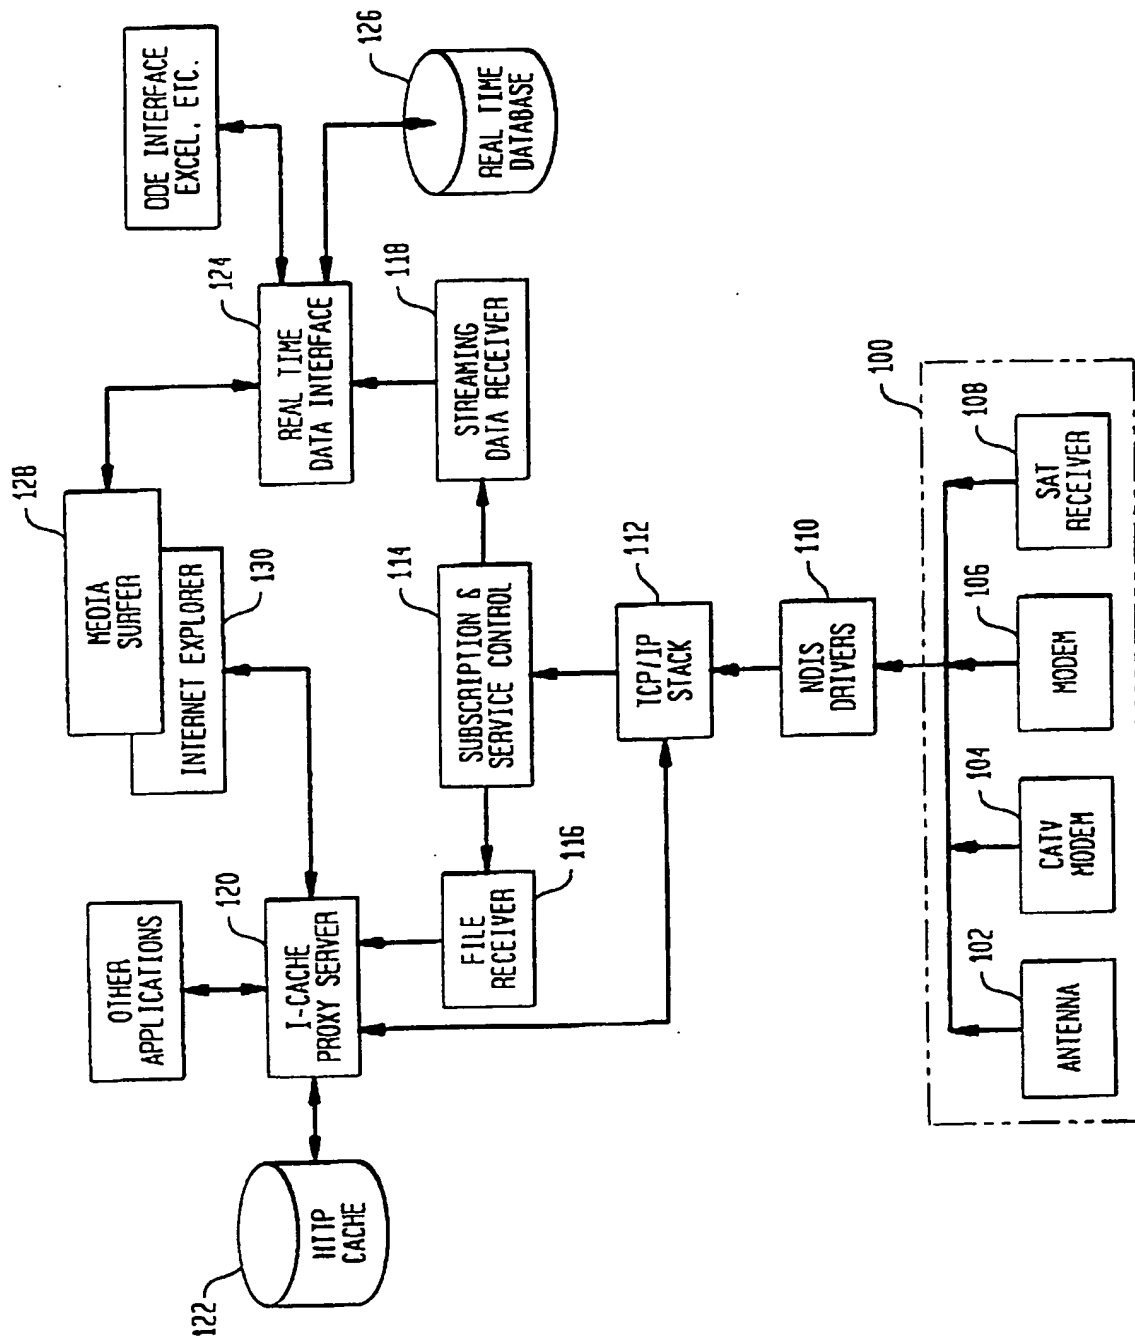


FIG. 10

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 99/00507

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 600 573 A (HENDRICKS JOHN S ET AL) 4 February 1997 see abstract see figures 1,2,6,7 see paragraph A.2 see paragraph A.3 ---	1-24
Y	US 5 659 350 A (BONNER ALFRED E ET AL) 19 August 1997 see column 23, line 24 - line 44 see column 24, line 23 - line 38 ---	1-24
A	WO 95 05050 A (TECHNOLOGY INC B V) 16 February 1995 see abstract see figures 1,8 --- -/--	1-24

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 June 1999

Date of mailing of the international search report

25/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Berbain, F

# INTERNATIONAL SEARCH REPORT

Inter:      nal Application No

PCT/IB 99/00507

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 09827 A (BURR PETER ANDREW ;NEC AUSTRALIA PTY LTD (AU); SIM PUAY KIA (AU);) 13 March 1997 see abstract ---	1-24
A	US 5 510 844 A (CIVANLAR MEHMET R ET AL) 23 April 1996 see abstract see figures 2,3 ---	12,16
A	ARCIDIACONO A: "MULTIMEDIA SERVICES AND DATA BROADCASTING VIA SATELLITE" ELECTRONICS AND COMMUNICATION ENGINEERING JOURNAL, vol. 9, no. 1, 1 February 1997, pages 33-37, XP002055257 see the whole document -----	1-24

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 99/00507

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5600573 A	04-02-1997	US 5659350 A	19-08-1997
		AU 691479 B	21-05-1998
		AU 5733194 A	04-07-1994
		DE 69323560 D	25-03-1999
		EP 0673580 A	27-09-1995
		JP 8506940 T	23-07-1996
		AU 691231 B	14-05-1998
		AU 1264095 A	19-06-1995
		BR 9408212 A	26-08-1997
		CA 2177152 A	08-06-1995
		EP 0732030 A	18-09-1996
		IL 111860 A	22-02-1998
		JP 9506226 T	17-06-1997
		NZ 277425 A	29-01-1997
		WO 9515657 A	08-06-1995
		AT 177277 T	15-03-1999
		AT 176840 T	15-03-1999
		AT 176841 T	15-03-1999
		AU 4440797 A	29-01-1998
		AU 4532597 A	05-02-1998
		AU 693775 B	09-07-1998
		AU 5732994 A	04-07-1994
		AU 692427 B	11-06-1998
		AU 5733094 A	04-07-1994
		AU 692428 B	11-06-1998
		AU 5733294 A	04-07-1994
		AU 5736394 A	04-07-1994
		AU 5845894 A	22-06-1994
		AU 5869894 A	04-07-1994
		AU 6066798 A	04-06-1998
		AU 6066898 A	04-06-1998
		CA 2151456 A	23-06-1994
		CA 2151457 A	23-06-1994
		CA 2151458 A	23-06-1994
		CA 2151459 A	23-06-1994
		CA 2151460 A	23-06-1994
		CA 2151461 A	09-06-1994
		CA 2151462 A	23-06-1994
		CN 1093211 A	05-10-1994
		CN 1090451 A	03-08-1994
		CN 1090452 A	03-08-1994
		CN 1096151 A	07-12-1994
		CN 1090453 A	03-08-1994
		CN 1090454 A	03-08-1994
		DE 69323562 D	25-03-1999
		DE 69323767 D	08-04-1999
		EP 0673578 A	27-09-1995
		EP 0673579 A	27-09-1995
		EP 0673581 A	27-09-1995
US 5659350 A	19-08-1997	AU 691231 B	14-05-1998
		AU 1264095 A	19-06-1995
		BR 9408212 A	26-08-1997
		CA 2177152 A	08-06-1995
		EP 0732030 A	18-09-1996
		IL 111860 A	22-02-1998
		JP 9506226 T	17-06-1997
		NZ 277425 A	29-01-1997

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter: 1st Application No

PCT/IB 99/00507

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5659350 A		WO 9515657 A	08-06-1995
		US 5600573 A	04-02-1997
		AT 177277 T	15-03-1999
		AT 176840 T	15-03-1999
		AT 176841 T	15-03-1999
		AU 4440797 A	29-01-1998
		AU 4532597 A	05-02-1998
		AU 693775 B	09-07-1998
		AU 5732994 A	04-07-1994
		AU 692427 B	11-06-1998
		AU 5733094 A	04-07-1994
		AU 691479 B	21-05-1998
		AU 5733194 A	04-07-1994
		AU 692428 B	11-06-1998
		AU 5733294 A	04-07-1994
		AU 5736394 A	04-07-1994
		AU 5845894 A	22-06-1994
		AU 5869894 A	04-07-1994
		AU 6066798 A	04-06-1998
		AU 6066898 A	04-06-1998
		CA 2151456 A	23-06-1994
		CA 2151457 A	23-06-1994
		CA 2151458 A	23-06-1994
		CA 2151459 A	23-06-1994
		CA 2151460 A	23-06-1994
		CA 2151461 A	09-06-1994
		CA 2151462 A	23-06-1994
		CN 1093211 A	05-10-1994
		CN 1090451 A	03-08-1994
		CN 1090452 A	03-08-1994
		CN 1096151 A	07-12-1994
		CN 1090453 A	03-08-1994
		CN 1090454 A	03-08-1994
		DE 69323560 D	25-03-1999
		DE 69323562 D	25-03-1999
		DE 69323767 D	08-04-1999
		EP 0673578 A	27-09-1995
		EP 0673579 A	27-09-1995
		EP 0673580 A	27-09-1995
		EP 0673581 A	27-09-1995
WO 9505050 A	16-02-1995	US 5418713 A	23-05-1995
		AU 7519994 A	28-02-1995
		CA 2192814 A	16-02-1995
		EP 0716795 A	19-06-1996
		US 5794217 A	11-08-1998
WO 9709827 A	13-03-1997	AU 6782896 A	27-03-1997
US 5510844 A	23-04-1996	EP 0713338 A	22-05-1996
		JP 8149420 A	07-06-1996



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**